


ADVANOX™

powered by **VAN REMMEN**
UV Technology

Advanox™ Focus series

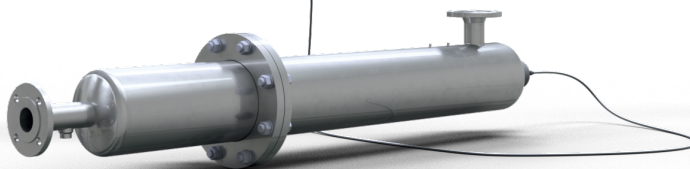

The Advanox Focus series is specially developed for micropollutant removal by the Advanced Oxidation Process (AOP) combining UV-C light and hydrogen peroxide (H_2O_2). It is designed for flexible and optimal water treatment where depending on the transmittance, target micropollutant, and removal goal; up to 26 m³/h can be treated per reactor. The series consists of three reactors that each have their own focus, but when looking at all three together can be used at transmittances of 70-99% and remove up to 99% of micropollutants.

The Focus series is a complete solution which is more

than just the reactor(s). To ensure successful and optimal application several functions are included, either as standard or as optional features for further optimization and control.

Advanox is a combination of oxidation, photolysis, and disinfection which makes it perfect for removal of micropollutants such as pharmaceuticals, antibiotics, hormones, pesticides, industrial pollutants and many more; but also for e.g. removal of antibiotic resistant bacteria, pathogens and UV-C sensitive compounds.

Advanox Focus 200

- Complete remote control possible with continuous monitoring
- No bromate (BrO_3^-), AOX or NDMA formation
- Low-pressure lamps with a long lifespan and high UV-C efficiency
- Easy to operate and maintain
- Reliable micropollutant removal of up to over 90%

Specifications

Type	Advanox Focus 200
UV chamber	
Material	316L / 1.4404 Stainless steel
In-/Outlet Connections	DN80
Pressure drop	< 0,2 bar
Max. Pressure	10 bar at 25°C
Dosing point connection	0.5" BSP
Mounting orientation	Horizontal
Diameter per reactor - A (mm)	204
Height - B (mm)	203
Installation dimension - C (mm)	1578
Length - D (mm)	1793
Required working space - E (mm)	3544
Weight (KG)	50
UV-C lamp	
Lamp type	600W Long Life
Preferred water temperature (°C)	5 °C - 30 °C
Lamp lifespan (hours)	12000
Number of lamps	1
Control Unit	
Material	Coated steel
Dimensions (lxbxh)	400x400x210 mm
Weight (kg)	8
Control features	Operation status, lamp status, lamp hours, system running time, volt free alarm contacts, hydrogen peroxide dosing and further process control depending on client requirements
Sensors (optional)	UV sensor (UVS), Temperature safety sensor (TSS)
Operating Voltage	230 VAC, 50/60 Hz
Electrical connection	16 A C-char./10A D-char.
Protection rating	IP54
Preferred ambient temperature (°C)	5°C - 35°C
Total Power Consumption (Watt)	660

Specifications

Type	Advanox Focus 200
Power Consumption	
In kWh/m ³ at dose of 5,000 J/m ²	0,10-0,26
Approvals	
Complies with	Low Voltage Directive (LVD) 2014/35/ EU, Electromagnetic Compatibility Directive (EMC) 2014/30/EU, Machinery Directive 2014/42/EC

Capacities - Transmittance diagram

T10	5000 J/ m ²	10000 J/ m ²	15000 J/ m ²	20000 J/ m ²
70%	2,6	1,3	0,9	0,6
75%	3,0	1,5	1,0	0,8
80%	3,6	1,8	1,2	0,9
85%	4,3	2,2	1,4	1,1
90%	5,2	2,6	1,7	1,3
95%	6,4	3,2	2,1	1,6
99%	7,5	3,8	2,5	1,9

